
10 REASONS TO CHOOSE



NEAR DRY ROUTING



- Totally eliminates flood coolant systems and all their associated expenses, including disposal of old oils.
- Tool life significantly extended.
- Achieves a greatly improved surface finish.
- 4 Easy to install, inexpensive run.
- Retrofits to any brand of routing machine.
- 6 Clean dry chips are produced.
- Operates on Coolube 2210, a high grade vegetable oil which is non hazardous, non toxic, non polluting, non drying and non staining
- Absolutely suitable for all metal, both ferrous and non ferrous, including stainless steel and exotic metals.
- 9 Consumes approx 20-30ml of oil per hour of continuous routing.
- 10 An environmentally clean, green and safe solution to hazardous flood coolant

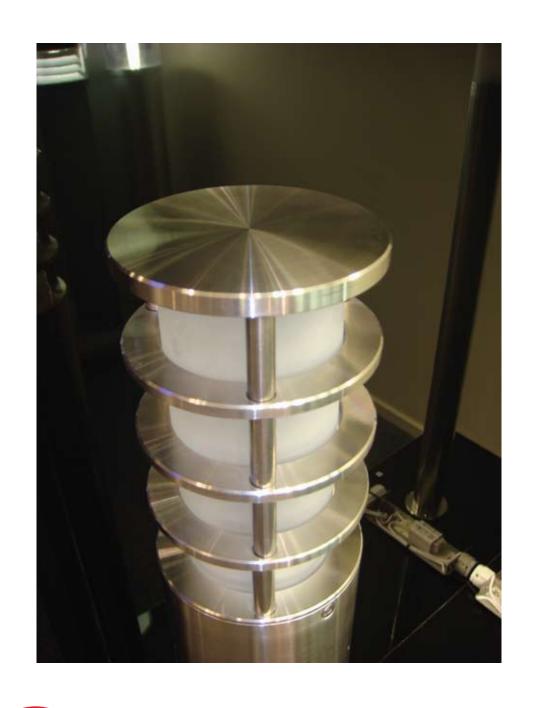

Unist Australia Pty Ltd

7 Bendtree Way, Castle Hill NSW 2154

www.unist.com.au

PH: (02) 8850 2022 FAX: (02) 8850 2033 MOB: 0418 274 946 Email: johnbarker@unist.com.au